




Decorative downlight luminaire for suspended ceilings, degree of water and dust-proof IP20 and IP44, for LED light sources.

TECHNICAL DATA	Mounting: in the ceiling, with mounting brackets (included) Body: aluminum Colour: white
ELECTRICAL DATA	Power supply efficiency: >86% Power: 220-240V 50/60Hz Includes light source: yes Type of equipment: ED
OPTICAL DATA	Electrical connection: max 2x1,5 mm ² wire Light distribution: circular Way of lighting: direct Reflector: aluminum polished faceted
ADDITIONAL INFO	Available on request: DALI, LED emergency module Operating temperature range: 0°C ... +40°C Other remarks: Flux of luminaire depends of the colour of the luminaire ring; claimed flux is appropriate for downlight luminaire in colour RAL9003
GENERAL DATA	Lifetime (L70B50): 50 000 h Warranty: 3 years + 2 years after project registration Application: boutiques, delicatessen, jeweler, shopping centers, supermarkets, museums

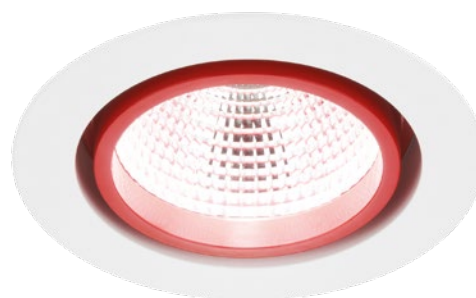

Code	IK	Power LED [W]	Luminaire power [W]	Lumen LED [lm]	Lumen luminaire [lm]	Efficacy [lm/W]	Colour temperature [K]	CRI/Ra
Degree of water and dust protection: IP20								
030241.5L01.3XX	IK00	11	13	1500	1245	96	3000	≥80
030241.5L02.3XX	IK00	11	13	1500	1245	96	4000	≥80
030241.5L03.3XX	IK00	16	18	2000	1650	92	3000	≥80
030241.5L04.3XX	IK00	16	18	2000	1650	92	4000	≥80
030241.5L05.3XX	IK00	22	25	3000	2500	100	3000	≥80
030241.5L06.3XX	IK00	22	25	3000	2500	100	4000	≥80
030241.5L07.3XX	IK00	40	45	5000	4100	91	3000	≥80
030241.5L08.3XX	IK00	40	45	5000	4100	91	4000	≥80
Degree of water and dust protection: IP20/44								
030261.5L01.3XX	IK04	11	13	1500	1245	96	3000	≥80
030261.5L02.3XX	IK04	11	13	1500	1245	96	4000	≥80
030261.5L03.3XX	IK04	16	18	2000	1660	92	3000	≥80
030261.5L04.3XX	IK04	16	18	2000	1660	92	4000	≥80
030261.5L05.3XX	IK04	22	25	3000	2490	100	3000	≥80
030261.5L06.3XX	IK04	22	25	3000	2490	100	4000	≥80
030261.5L07.3XX	IK04	40	45	5000	4100	91	3000	≥80
030261.5L08.3XX	IK04	40	45	5000	4100	91	4000	≥80


Luminous flux tolerance +/- 10%.

030241.5L01.3




- Ring colour
- 1 white
 - 3 black
 - 4 red
 - 5 blue
 - 6 green
- Beam angle
- 1 36°
 - 2 76°

Code	Dimensions [mm] W H	Mounting dimensions [mm] W	Pallet quantity	Quantity in package	Net weight [kg]
Degree of water and dust protection: IP20					
030241.5L01.3XX	192 117	170	240	1	1.1
030241.5L02.3XX	192 117	170	240	1	1.1
030241.5L03.3XX	192 117	170	240	1	1.1
030241.5L04.3XX	192 117	170	240	1	1.1
030241.5L05.3XX	192 117	170	240	1	1.1
030241.5L06.3XX	192 117	170	240	1	1.1
030241.5L07.3XX	192 117	170	240	1	1.1
030241.5L08.3XX	192 117	170	240	1	1.1
Degree of water and dust protection: IP20/44					
030261.5L01.3XX	192 117	170	240	1	1.1
030261.5L02.3XX	192 117	170	240	1	1.1
030261.5L03.3XX	192 117	170	240	1	1.1
030261.5L04.3XX	192 117	170	240	1	1.1
030261.5L05.3XX	192 117	170	240	1	1.1
030261.5L06.3XX	192 117	170	240	1	1.1
030261.5L07.3XX	192 117	170	240	1	1.1
030261.5L08.3XX	192 117	170	240	1	1.1

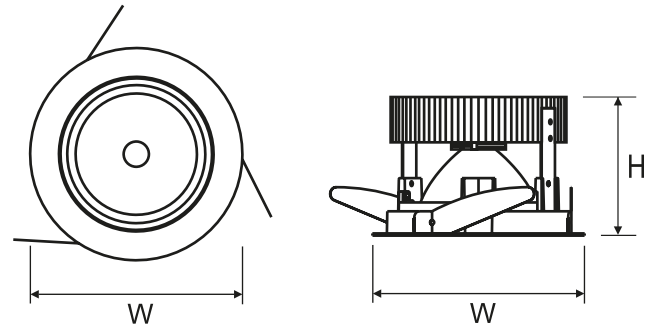

AVAILABLE VERSIONS

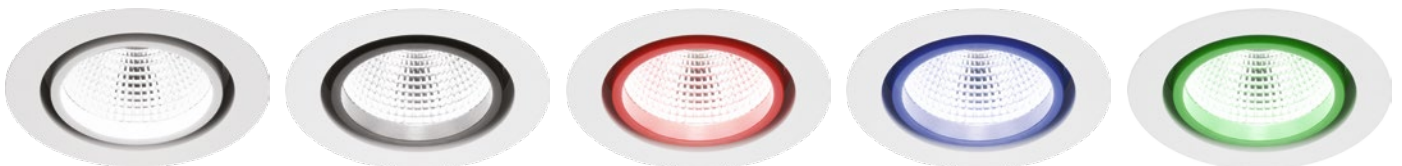

white



black

red

blue


green

Luminous flux tolerance +/- 10%.

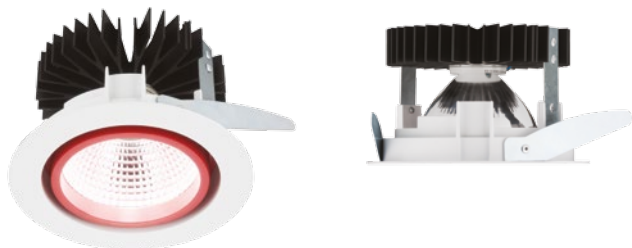OTHER PICTURES**ACCESSORIES**

150100.00518

Mounting plate

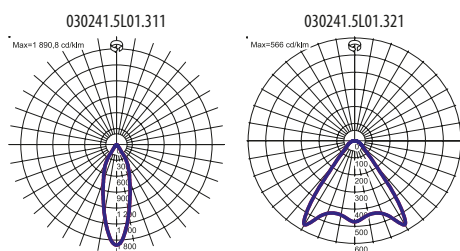LIGHT BEAM CURVES**OTHER PROJECTS**

Dalia Lingerie store, Poznan and Gliwice, Poland

FLAIR MODE boutique, Vendaam Shopping Mall, Groningen, The Netherlands

Second Line of Warsaw Metro, Warsaw, Poland

Luminous flux tolerance +/- 10%.