

Recessed modern downlight, for suspended ceilings with adjustable optics for integrated LED modules.


TECHNICAL DATA	Mounting: in the ceiling, with mounting brackets (included) Body: high pressure die-cast aluminum Colour: white
ELECTRICAL DATA	Power supply efficiency: >89% Power: 220-240V 50/60Hz Includes light source: yes Type of equipment: ED
OPTICAL DATA	Electrical connection: max 2x1,5 mm ² wire Light distribution: circular Way of lighting: direct Reflector: aluminum polished faceted
ADDITIONAL INFO	Available on request: DALI Operating temperature range: 0°C ... +35°C Lifetime (L70B50): 50 000 h
GENERAL DATA	Warranty: 3 years + 2 years after project registration Application: boutiques, delicatessen, jeweler, shopping centers, supermarkets, museums



Code	Beam angle	Power LED [W]	Luminaire power [W]	Lumen LED [lm]	Lumen luminaire [lm]	Efficacy [lm/W]	Colour temperature [K]	CRI/Ra
030361.5L01.301	14°	27	30	3200	2600	87	3000	≥80
030361.5L01.302	30°	27	30	3200	2550	85	3000	≥80
030361.5L01.303	46°	27	30	3200	2550	85	3000	≥80
030361.5L02.301	14°	22	25	3250	2700	108	4000	≥80
030361.5L02.302	30°	22	25	3250	2600	104	4000	≥80
030361.5L02.303	46°	22	25	3250	2650	106	4000	≥80
030361.5L03.301	14°	34	38	4050	3250	86	3000	≥80
030361.5L03.302	30°	34	38	4050	3200	84	3000	≥80
030361.5L03.303	46°	34	38	4050	3150	83	3000	≥80
030361.5L04.301	14°	34	38	4300	3450	91	4000	≥80
030361.5L04.302	30°	34	38	4300	3400	89	4000	≥80
030361.5L04.303	46°	34	38	4300	3350	88	4000	≥80
030361.5L05.301	14°	46	52	5100	4050	78	3000	≥80
030361.5L05.302	30°	46	52	5100	4000	77	3000	≥80
030361.5L05.303	46°	46	52	5100	3950	76	3000	≥80
030361.5L06.301	14°	46	52	5400	4300	83	4000	≥80
030361.5L06.302	30°	46	52	5400	4250	82	4000	≥80
030361.5L06.303	46°	46	52	5400	4200	81	4000	≥80

Luminous flux tolerance +/- 10%.


Code	Dimensions [mm] W H	Mounting dimensions [mm] W	Pallet quantity	Quantity in package	Net weight [kg]
030361.5L01.301	194 170	180	216	1	1.5
030361.5L01.302	194 170	180	216	1	1.5
030361.5L01.303	194 170	180	216	1	1.5
030361.5L02.301	194 170	180	216	1	1.5
030361.5L02.302	194 170	180	216	1	1.5
030361.5L02.303	194 170	180	216	1	1.5
030361.5L03.301	194 170	180	216	1	1.5
030361.5L03.302	194 170	180	216	1	1.5
030361.5L03.303	194 170	180	216	1	1.5
030361.5L04.301	194 170	180	216	1	1.5
030361.5L04.302	194 170	180	216	1	1.5
030361.5L04.303	194 170	180	216	1	1.5
030361.5L05.301	194 170	180	216	1	1.5
030361.5L05.302	194 170	180	216	1	1.5
030361.5L05.303	194 170	180	216	1	1.5
030361.5L06.301	194 170	180	216	1	1.5
030361.5L06.302	194 170	180	216	1	1.5
030361.5L06.303	194 170	180	216	1	1.5



OTHER PICTURES



LIGHT BEAM CURVES

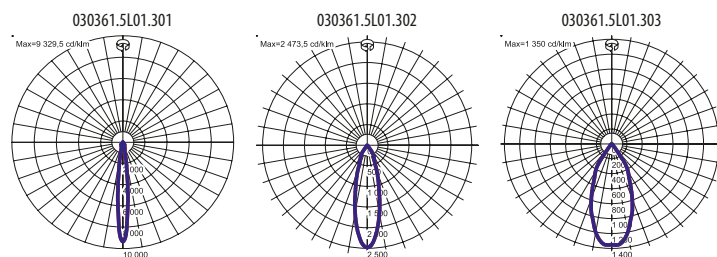

Luminous flux tolerance +/- 10%.

OTHER PROJECTS

Supermarket Intermarche, Bukowna, Poland



FLAIR MODE boutique, Vendaam Shopping Mall, Groningen, The Netherlands

Luminous flux tolerance +/- 10%.