



Suspended decorative luminaire for LED light sources.

TECHNICAL DATA

Mounting: suspended, on wire suspension (included)

Body: plastic polyester reinforced with fiberglass

Colour: black

Diffuser: microprismatic diffuser (MPRM), opal plexiglass (PLX)

ELECTRICAL DATA

Power: 220-240V 50/60Hz

Includes light source: yes

Type of equipment: ED

OPTICAL DATA

Way of lighting: direct

GENERAL DATA

Available on request: DIM 1..10V, DALI


Warranty: 5 years

Application: offices, conference rooms, reception desks, shopping centers, car showrooms, boutiques




Code	Beam angle	Power LED [W]	Luminaire power [W]	Lumen LED [lm]	Lumen luminaire [lm]	Efficacy [lm/W]	Colour temperature [K]	CRI/Ra
Diffuser: microprismatic diffuser (MPRM)								
200093.5L01.112	100°	105	124	14850	11300	91	3000	≥80
Diffuser: opal plexiglass (PLX)								
200093.5L01.111	100°	105	124	14300	10700	86	3000	≥80
Diffuser: microprismatic diffuser (MPRM)								
200093.5L02.112	100°	105	124	14850	11700	94	4000	≥80
Diffuser: opal plexiglass (PLX)								
200093.5L02.111	100°	105	124	14300	11150	90	4000	≥80

Code	Dimensions [mm] L W H	Mounting dimensions [mm] L D	Pallet quantity	Quantity in package	Net weight [kg]
Diffuser: microprismatic diffuser (MPRM)					
200093.5L01.112	1110 570 455	540 68	1	1	19.5
Diffuser: opal plexiglass (PLX)					
200093.5L01.111	1110 570 455	540 68	1	1	19.5
Diffuser: microprismatic diffuser (MPRM)					
200093.5L02.112	1110 570 455	540 68	1	1	19.5
Diffuser: opal plexiglass (PLX)					
200093.5L02.111	1110 570 455	540 68	1	1	19.5

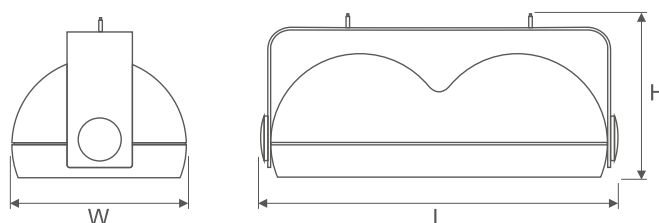

LIGHT BEAM CURVES

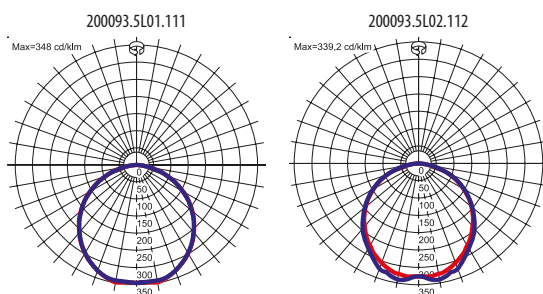

Designed by LUG Design Team

Luminous flux tolerance +/- 10%.

Lighting beam, light intensity distribution and light efficiency were examined in accordance with the EN ISO 17025:2005 norm for EN13032 norm series and the LM-79 norm.

Up-to-date product info available on our website www.flashdq.com