



Suspended decorative luminaire for LED light sources.

TECHNICAL DATA

Mounting: suspended, on wire suspension (included)

Body: plastic polyester reinforced with fiberglass

Colour: white, black

Diffuser: opal plexiglass (PLX), microprismatic diffuser (MPRM)

ELECTRICAL DATA

Power: 220-240V 50/60Hz

Includes light source: yes

Type of equipment: ED

OPTICAL DATA

Way of lighting: direct

GENERAL DATA

Available on request: opal diffuser, DALI, DIM 1..10V

Warranty: 5 years

Application: offices, conference rooms, reception desks, shopping centers, car showrooms, boutiques




Code	Power LED [W]	Luminaire power [W]	Lumen LED [lm]	Lumen luminaire [lm]	Efficacy [lm/W]	Colour temperature [K]	CRI/Ra
Diffuser: opal plexiglass (PLX)							
20002X.5L01.1X1	107	126	15600	12300	98	4000	≥80
20002X.5L02.1X1	107	126	15000	11900	94	3000	≥80
Diffuser: microprismatic diffuser (MPRM)							
20002X.5L01.1X2	107	126	15600	12300	98	4000	≥80
20002X.5L02.1X2	107	126	15000	11900	94	3000	≥80

20002 [] .5L01.1 [] 2

Colour of decorative elements	
1	pink
2	red
3	green
4	blue
5	yellow

Body colour	
1	white
3	black

Code	Dimensions [mm] L W H	Mounting dimensions [mm] L D	Pallet quantity	Quantity in package	Net weight [kg]
Diffuser: opal plexiglass (PLX)					
20002X.5L01.1X1	886 886 1060	400 80	1	1	21.0
20002X.5L02.1X1	886 886 1060	400 80	1	1	21.0
Diffuser: microprismatic diffuser (MPRM)					
20002X.5L01.1X2	886 886 1060	400 80	1	1	21.0
20002X.5L02.1X2	886 886 1060	400 80	1	1	21.0

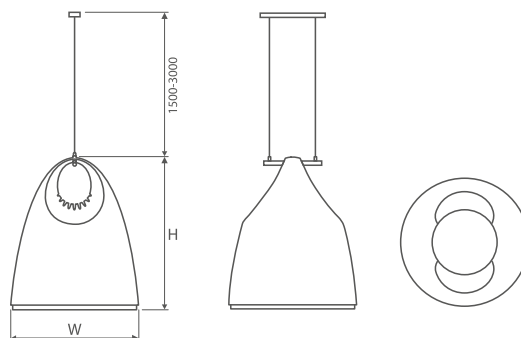

Designed by LUG Design Team

Luminous flux tolerance +/- 10%.


Lighting beam, light intensity distribution and light efficiency were examined in accordance with the EN ISO 17025:2005 norm for EN13032 norm series and the LM-79 norm.

Up-to-date product info available on our website www.flashdq.com

OTHER PICTURES



LIGHT BEAM CURVES



OTHER PROJECTS



Hamama Bilo, Tel Aviv, Israel

Frikirken Church, Norway

Designed by LUG Design Team

Luminous flux tolerance +/- 10%.

Lighting beam, light intensity distribution and light efficiency were examined in accordance with the EN ISO 17025:2005 norm for EN13032 norm series and the LM-79 norm.

Up-to-date product info available on our website www.flashdq.com

Date of issue: 23-6-2017

The LUG Company reserves right to introduce any construction changes and improvements into the lighting luminaires