




Suspended decorative luminaire for LED light sources.

TECHNICAL DATA	Mounting: suspended, on wire suspension (included)
	Body: anodized aluminum
	Colour: gray, black
ELECTRICAL DATA	Power: 220-240V 50/60Hz
	Includes light source: yes
	Type of equipment: ED
OPTICAL DATA	Way of lighting: direct-indirect
GENERAL DATA	Warranty: 5 years
	Application: offices, conference rooms, reception desks, shopping centers, car showrooms, boutiques



Code	Power LED [W]	Luminaire power [W]	Lumen LED [lm]	Lumen luminaire [lm]	Efficacy [lm/W]	Colour temperature [K]	CRI/Ra
Colour: gray							
200042.5L01.112	11	13	1600	1000	77	3000	≥80
200042.5L02.112	11	13	1600	1000	77	4000	≥80
Colour: black							
200043.5L01.112	11	13	1600	1000	77	3000	≥80
200043.5L02.112	11	13	1600	1000	77	4000	≥80

Code	Dimensions [mm] L W H	Pallet quantity	Quantity in package	Net weight [kg]
Colour: gray				
200042.5L01.112	270 100 43	48	1	2.0
200042.5L02.112	270 100 43	48	1	2.0
Colour: black				
200043.5L01.112	270 100 43	-	1	2.0
200043.5L02.112	270 100 43	-	1	2.0

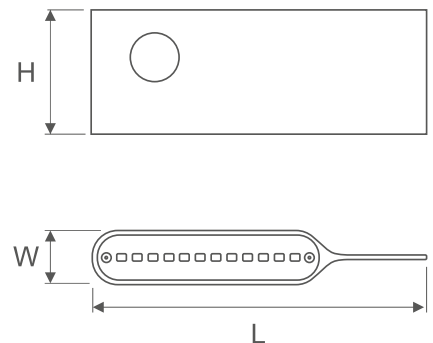

Designed by LUG Design Team

Luminous flux tolerance +/- 10%.


Lighting beam, light intensity distribution and light efficiency were examined in accordance with the EN ISO 17025:2005 norm for EN13032 norm series and the LM-79 norm.

Up-to-date product info available on our website www.flashdq.com

OTHER PICTURES



LIGHT BEAM CURVES

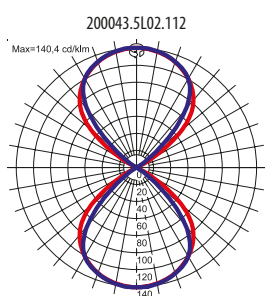

Designed by LUG Design Team

Luminous flux tolerance +/- 10%.

Lighting beam, light intensity distribution and light efficiency were examined in accordance with the EN ISO 17025:2005 norm for EN13032 norm series and the LM-79 norm.

Up-to-date product info available on our website www.flashdq.com

Date of issue: 23-6-2017

The LUG Company reserves right to introduce any construction changes and improvements into the lighting luminaires