

Modern downlight luminaire for LED light sources for plaster board ceilings.

#### TECHNICAL DATA

**Mounting:** in the ceiling, with mounting brackets (included)

**Body:** powder painted steel sheet and anodized aluminum

**Colour:** white, black

#### ELECTRICAL DATA

**Power:** 220-240V 50/60Hz

**Includes light source:** yes

**Type of equipment:** ED

#### OPTICAL DATA

**Way of lighting:** direct

#### GENERAL DATA

**Available on request:** metal halide lamps (on request), DALI

**Other remarks:** for metal halide version - please order MH light sources

**Warranty:** 5 years

**Application:** hotels, offices, delicatessen, galleries, boutiques, shopping centers




Code	Beam angle	Power LED [W]	Luminaire power [W]	Lumen LED [lm]	Lumen luminaire [lm]	Efficacy [lm/W]	Colour temperature [K]	CRI/Ra
22002X.5L401.3X7	24°	4x17,5W	83	4x1560	6240	75	4000	92
22002X.5L402.3X7	24°	4x17,5W	83	4x1430	5720	69	3000	92
22002X.5L403.3X7	40°	4x17,5W	83	4x1560	6240	75	4000	92
22002X.5L404.3X7	40°	4x17,5W	83	4x1430	5720	69	3000	92

22002  .5L101.3  1

	Colour of decorative elements
1	<input type="checkbox"/> pink
2	<input type="checkbox"/> red
3	<input type="checkbox"/> green
4	<input type="checkbox"/> blue
5	<input type="checkbox"/> yellow
6	<input type="checkbox"/> white
7	<input type="checkbox"/> black
Body colour	
1	<input type="checkbox"/> white
3	<input type="checkbox"/> black

Code	Dimensions [mm] L W H	Pallet quantity	Quantity in package	Net weight [kg]
22002X.5L401.3X7	500 348 144	30	1	5.5
22002X.5L402.3X7	500 348 144	30	1	5.5
22002X.5L403.3X7	500 348 144	30	1	5.5
22002X.5L404.3X7	500 348 144	30	1	5.5




Designed by LUG Design Team

Luminous flux tolerance +/- 10%.

Lighting beam, light intensity distribution and light efficiency were examined in accordance with the EN ISO 17025:2005 norm for EN13032 norm series and the LM-79 norm.

Up-to-date product info available on our website [www.flashdq.com](http://www.flashdq.com)

## LIGHT BEAM CURVES

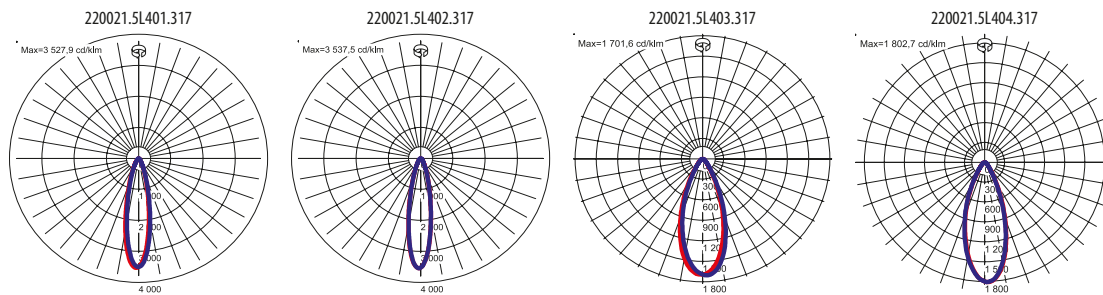

Designed by LUG Design Team

Luminous flux tolerance +/- 10%.

Lighting beam, light intensity distribution and light efficiency were examined in accordance with the EN ISO 17025:2005 norm for EN13032 norm series and the LM-79 norm.

Up-to-date product info available on our website [www.flashdq.com](http://www.flashdq.com)

Date of issue: 23-6-2017

The LUG Company reserves right to introduce any construction changes and improvements into the lighting luminaires