


Modern interior projector equipped with LED light source, with the possibility of adjusting the angle of light.



TECHNICAL DATA	Mounting: in 3-phase track Body: aluminum Colour: black
ELECTRICAL DATA	Power supply efficiency: >94% Power: 220-240V 50/60Hz Includes light source: yes Type of equipment: ED Electrical connection: in 3-phase track
OPTICAL DATA	Light distribution: circular Way of lighting: direct
ADDITIONAL INFO	Operating temperature range: 0° C ... +35° C Lifetime (L70B50): 50 000 h
GENERAL DATA	Warranty: 5 years Application: museums, boutiques, jeweler, shopping centers, car showrooms, exhibitions, exhibitions

Code	Beam angle	Power LED [W]	Luminaire power [W]	Lumen LED [lm]	Lumen luminaire [lm]	Colour temperature [K]	CRI/Ra
020163.5L01.01	14° - 40°	15	16	1150	850-1050	3000	≥80
020163.5L02.01	14° - 40°	15	16	1150	850-1050	4000	≥80
020163.5L03.01	14° - 40°	15	16	1150	850-1050	6000	>80

Code	Dimensions [mm] W H D	Pallet quantity	Quantity in package	Net weight [kg]
020163.5L01.01	210 226 70	240	4	1.3
020163.5L02.01	210 226 70	240	4	1.3
020163.5L03.01	210 226 70	240	4	1.3

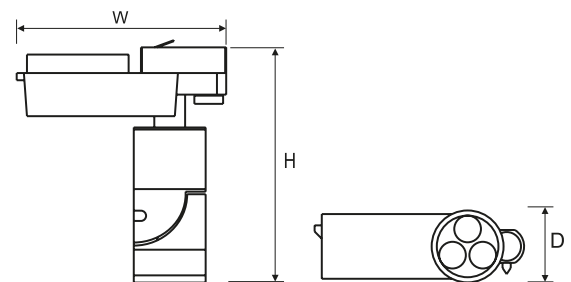

ACCESSORIES



- 150091.00121
- 150092.00122
- 150093.00123

Mounting bases




- 150091.00124
- 150092.00125
- 150093.00126

Recessed box

Luminous flux tolerance +/- 10%.

LIGHT BEAM CURVES



Luminous flux tolerance +/- 10%.