



Modern LED luminaire for quick assembly, construction of the luminaire enables quick, easy and tool-less connection into long lighting systems (available in 1,13m and 2,8m-long dimension) by the usage of mounting elements.

TECHNICAL DATA	Mounting: suspended, on wire suspension (on request) Body: coated steel sheet Colour: white
ELECTRICAL DATA	Power supply efficiency: >90% Power: 220-240V 50/60Hz Includes light source: yes Type of equipment: ED Electrical connection: max 5x2,5 mm ² wire
OPTICAL DATA	Light distribution: symmetric, asymmetric, double asymmetric Way of lighting: direct Type of optic: lens
ADDITIONAL INFO	Available on request: DALI Operating temperature range: 0°C ... +35°C Lifetime (L80B10): 60 000 h
GENERAL DATA	Warranty: 5 years Application: supermarkets, warehouses, logistics centers, warehouses



Code	Power LED [W]	Luminaire power [W]	Lumen LED [lm]	Lumen luminaire [lm]	Efficacy [lm/W]	Colour temperature [K]	CRI/Ra
080111.5L10.3X	20	23	3000	2950	128	3000	≥80
080111.5L04.3X	20	23	3300	3100	135	4000	≥80
080111.5L12.3X	29	32	4100	3950	123	3000	≥80
080111.5L06.3X	29	32	4400	4150	130	4000	≥80
080111.5L14.3X	43	45	5500	5300	118	3000	≥80
080111.5L08.3X	43	45	6000	5500	122	4000	≥80
080111.5L11.4X	50	58	7500	7400	128	3000	≥80
080111.5L05.4X	50	58	8200	7750	134	4000	≥80
080111.5L13.4X	73	80	10200	9900	124	3000	≥80
080111.5L07.4X	73	80	11100	10400	130	4000	≥80
080111.5L15.4X	107	113	13700	13250	117	3000	≥80
080111.5L09.4X	107	113	15000	13750	122	4000	≥80


080111.5L10.3



Light distribution

- 1 symmetric
- 2 asymmetric
- 3 double asymmetric

Code	Dimensions [mm] L W H	Pallet quantity	Net weight [kg]
080111.5L10.3X	1128 68 49	150	2.0
080111.5L04.3X	1128 68 49	150	2.0
080111.5L12.3X	1128 68 49	150	2.0
080111.5L06.3X	1128 68 49	150	2.0
080111.5L14.3X	1128 68 49	150	2.0
080111.5L08.3X	1128 68 49	150	2.0
080111.5L11.4X	2815 68 49	150	4.1

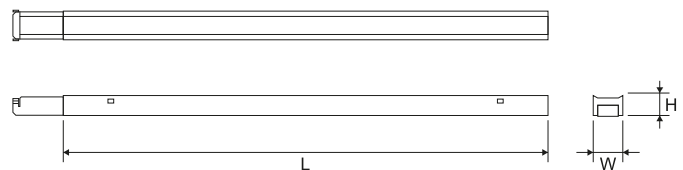

Luminous flux tolerance +/- 10%.

Code	Dimensions [mm] L W H	Pallet quantity	Net weight [kg]
080111.5L05.4X	2815 68 49	150	4.1
080111.5L13.4X	2815 68 49	150	4.1
080111.5L07.4X	2815 68 49	150	4.1
080111.5L15.4X	2815 68 49	150	4.2
080111.5L09.4X	2815 68 49	150	4.2

OTHER PICTURES



ACCESSORIES



150111.00763

LUGTRACK LENS LED Starter KIT (set of power connectors, 2x end cap, 1x mounting bracket)



150110.00819

Suspension chain (2m)

150110.00820


Suspension chain (4m)



150110.00765

Hook

LIGHT BEAM CURVES

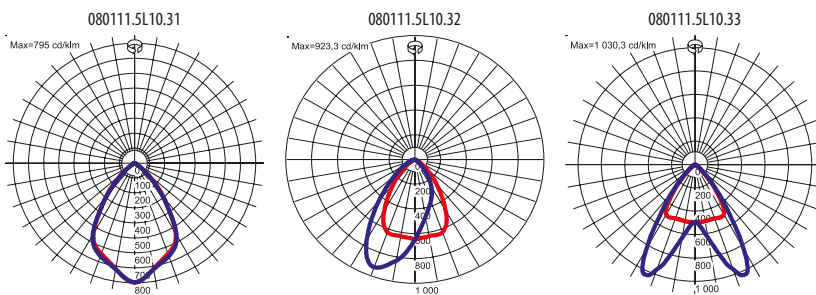

Luminous flux tolerance +/- 10%.