




Industrial luminaire for LED light sources.

TECHNICAL DATA	Mounting: surface mounted Body: powder-painted steel sheet Colour: white
ELECTRICAL DATA	Diffuser: tempered glass Power supply efficiency: >95% Power: 220-240V 50/60Hz Includes light source: yes
OPTICAL DATA	Type of equipment: STANDARD, EM 3h Way of lighting: direct
ADDITIONAL INFO	Available on request: DALI Operating temperature range: -20° C ... +35° C Lifetime (L70B50): 50 000 h
GENERAL DATA	Warranty: 5 years Application: Gas stations, warehouses, production halls, roofing




Code	Power LED [W]	Luminaire power [W]	Lumen LED [lm]	Lumen luminaire [lm]	Efficacy [lm/W]	Colour temperature [K]	CRI/Ra
Type of equipment: STANDARD							
090321.5L01.271	48	52	6200	5250	101	4000	≥80
Type of equipment: EM 3h							
090321.5L01B.271	48	53	6200	5250	99	4000	≥80

Code	Dimensions [mm] L W H	Mounting dimensions [mm] L W	Pallet quantity	Quantity in package	Net weight [kg]
Type of equipment: STANDARD					
090321.5L01.271	550 300 114	447 197	40	1	6.0
Type of equipment: EM 3h					
090321.5L01B.271	550 300 114	447 197	40	1	7.0

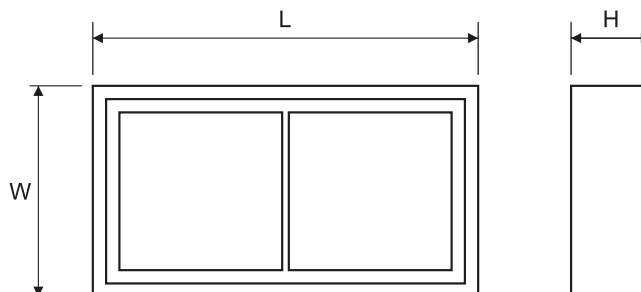

LIGHT BEAM CURVES



Luminous flux tolerance +/- 10%.